

AD-A200 384

②

DTIC FILE COPY

OFFICE OF NAVAL RESEARCH

Contract N00014-83-K-0470-P00003

R&T Code NR 33359-718

Technical Report No. 123

The Behavior of Microdisk and Microring Electrodes.
The Chronoamperometric Response at Microdisk and Microring Electrodes

by

L.J. Li, M. Hawkins, J.W. Pons, M. Fleischmann, S. Pons and L.M. Abrantes

Prepared for publication in J. Electroanal. Chem.

Department of Chemistry
University of Utah
Salt Lake City, UT 84112

July 15, 1988

DTIC
ELECTE
NOV 14 1988
S D
CH

Reproduction in whole, or in part, is permitted for
any purpose of the United States Government

DISTRIBUTION STATEMENT A

Approved for public release;
Distribution Unlimited

88 11 10 074

SECURITY CLASSIFICATION OF THIS PAGE

REPORT DOCUMENTATION PAGE

1a. REPORT SECURITY CLASSIFICATION Unclassified			1b. RESTRICTIVE MARKINGS		
2a. SECURITY CLASSIFICATION AUTHORITY			3. DISTRIBUTION/AVAILABILITY OF REPORT Approved for public release and sale. Distribution unlimited.		
2b. DECLASSIFICATION/DOWNGRADING SCHEDULE					
4. PERFORMING ORGANIZATION REPORT NUMBER(S) ONR Technical Report No. 123			5. MONITORING ORGANIZATION REPORT NUMBER(S)		
6a. NAME OF PERFORMING ORGANIZATION University of Utah		6b. OFFICE SYMBOL (If applicable)	7a. NAME OF MONITORING ORGANIZATION		
6c. ADDRESS (City, State, and ZIP Code) Department of Chemistry Henry Eyring Building Salt Lake City, UT 84112			7b. ADDRESS (City, State, and ZIP Code)		
8a. NAME OF FUNDING/SPONSORING ORGANIZATION Office of Naval Research		8b. OFFICE SYMBOL (If applicable)	9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER N00014-83-K-0470-P00003		
8c. ADDRESS (City, State, and ZIP Code) Chemistry Program, Code 1113 800 N. Quincy Street Arlington, VA 22217			10. SOURCE OF FUNDING NUMBERS		
			PROGRAM ELEMENT NO.	PROJECT NO.	TASK NO.
11. TITLE (Include Security Classification) The Behavior of Microdisk and Microring Electrodes. The Chronoamperometric Response at Microdisk and Microring Electrodes					
12. PERSONAL AUTHOR(S) L. L. M. Hawkins, J.W. Pons, M. Fleischmann, S. Pons and L.M. Abrantes					
13a. TYPE OF REPORT Technical		13b. TIME COVERED FROM 9/87 TO 7/88		14. DATE OF REPORT (Year, Month, Day) July 15, 1988	
15. PAGE COUNT 24					
16. SUPPLEMENTARY NOTATION					
17. COSATI CODES			18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number) microelectrodes , mass transport		
FIELD	GROUP	SUB-GROUP			
19. ABSTRACT (Continue on reverse if necessary and identify by block number) Attached.					
20. DISTRIBUTION/AVAILABILITY OF ABSTRACT <input checked="" type="checkbox"/> UNCLASSIFIED/UNLIMITED <input type="checkbox"/> SAME AS RPT <input type="checkbox"/> DTIC USERS			21. ABSTRACT SECURITY CLASSIFICATION Unclassified		
22a. NAME OF RESPONSIBLE INDIVIDUAL Stanley Pons			22b. TELEPHONE (Include Area Code) (801)581-4760		22c. OFFICE

DD FORM 1473, 84 MAR

83 APR edition may be used until exhausted

All other editions are obsolete.

SECURITY CLASSIFICATION

Abstract

We report the theoretical chronoamperometric response for a ring electrode of finite size, and compare the experimental response to that of a disk electrode. As expected, the response of the ring electrode approaches mass transport conditions close to those for the final steady state at times which are short compared to those at which the steady state is reached for disks of similar radii. The theoretical analysis is based on the properties of discontinuous integrals of Bessel functions which give exact solutions to diffusion problems with discontinuous boundary conditions in the circular cylindrical coordinate system.



Accession For	
NTIS GRA&I	<input checked="checked" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	

THE BEHAVIOR OF MICRODISK AND MICRORING ELECTRODES.
THE CHRONOAMPEROMETRIC RESPONSE AT MICRODISK AND
MICRORING ELECTRODES.

L. J. Li, Marvin Hawkins, Joseph W. Pons,
John Daschbach, and Stanley Pons^{*}
Department of Chemistry
University of Utah
Salt Lake City, UT 84112
USA

Martin Fleischmann
Department of Chemistry
The University
Southampton, Hants. SO9 5NH
ENGLAND

L.M. Abrantes
CECUL Department of Chemistry
Faculty of Science
University of Lisbon
1294 Lisbon CODEX, Portugal

^{*} To whom correspondence should be addressed.

Introduction

We have previously derived the exact response for chronoamperometric experiments at disk microelectrodes (1,2) under conditions of uniform surface flux. We have discussed (3) the significance of this approximation and its implications. Additionally, we have discussed (4) the advantages in using ring microelectrodes; the significant increase of mass transport rates to ring geometries compared to disks leads to greater convenience in the measurement of kinetic parameters.

While the problem of the mixed boundary conditions governing electron transfer reactions and the mass transfer process at electrodes of finite size has presented many difficulties for the solution of the diffusion equation, workers have reported a number of approximate solutions and numerical simulations to the problem (5-11). While most of these assume a uniform surface concentration model, a uniform surface flux model is probably more appropriate; the true solution will lie between these limiting cases. Additionally, we have shown that there is only a small difference in these solutions; the greatest errors will occur when assuming uniform flux conditions when the limiting current has been reached, or when assuming uniform concentration conditions early in the experiment when the reaction is kinetically controlled (1). The complete response, which must treat the transition from pure kinetic control to total mass transport control has been determined by applying Neumann's integral theorem and will be the subject of other reports (12-16). We present here the analysis of the problem at a ring and a disk based on the use of discontinuous Bessel integrals. The result is an expression (given in Laplace space) for the response that can be inverted at all times; this has been a difficulty in other work (5,10-11). The expressions give the known limiting cases at short and long times.

At very small microelectrodes, chronoamperometric experiments will not be

particularly useful because of the rapid approach to a steady state and the difficulties in measuring fast transients at low current levels. However, there are numerous special applications (1) where the technique may be interesting.

Experimental

All solutions were prepared from water from a Nanopure (Barnstead) system; chemicals were all analytical reagent grade and were used as received. The solutions used were 1, 5, and 10mM $\text{Ru(III)(NH}_3)_6^{3+}$ in 0.1M KCl and 1mM Fe(II)(CN)_6^{4-} in 0.1M KNO_3 . The solutions were thoroughly purged with nitrogen before making measurements. The secondary - pseudo reference electrode was a large platinum wire. The working electrodes were 1, 5, 10, and 25 μm diameter platinum disk electrodes (from the appropriate wires obtained from Goodfellow Metals), and a gold ring electrode with a diameter of 2.4 μm and a thickness of approximately 300Å (*vide infra*). These were made as described previously (4).

The potential step was applied by a wave form generator (Hi-Tek Instruments model PPR1), and the current response was measured by a fast current amplifier (Keithley model 427). Under the conditions of these experiments, the rise time of the amplifier was faster than 60 μs . The transients were recorded on a 125MHz Lecroy model 9400 digitizing oscilloscope. We made all measurements inside an aluminum Faraday cage to reduce capacitatively coupled noise; all leads were kept as short as possible and connections to the cell were made through bulkhead connectors using low noise coaxial cable.

Keywords: Cations, Rubidium compounds, Iron, Cations, Cations, Alloys, Electrochemistry, ATR-FTIR

Theoretical Considerations, Results, and Discussion

In the previous work on chronoamperometry at the disk (2), we investigated the general solution to the diffusion equation in circular cylindrical coordinates

$$\frac{\partial C}{\partial t} = D \frac{\partial^2 C}{\partial r^2} + \frac{D}{r} \frac{\partial C}{\partial r} + D \frac{\partial^2 C}{\partial z^2} \quad [1]$$

under conditions of constant, uniform surface flux across the surface of the disk

$$D \left[\frac{\partial C}{\partial z} \right] = Q \quad 0 < r < a, \quad z = 0 \quad [2]$$

which is

$$C = C^\infty - \frac{Qa}{D} \int_0^\infty \exp[-\lambda z] J_0(\lambda r) J_1(\lambda a) \frac{d\lambda}{\lambda} \quad [3]$$

We showed in that work that the general result for the surface concentration in the non-steady state due to a surface flux $Q(t)$ is given in Laplace space by

$$\bar{C} = \frac{C^\infty}{s} - \frac{Q(s)a}{D} \int_0^\infty J_0(\alpha r) J_1(\alpha a) \frac{d\alpha}{(\alpha^2 + q^2)^{1/2}} \quad [4]$$

Here we have $q^2 = \frac{s}{D}$. The average surface concentration is

$$\begin{aligned}\bar{C}_{Av} &= \frac{C^\infty}{s} - \frac{Q(s)a}{D} \int_0^a \int_0^\infty J_0(\alpha r) J_1(\alpha a) \frac{r \, d\alpha \, dr}{(\alpha^2 + q^2)^{1/2}} \\ &= \frac{C^\infty}{s} - \frac{2Q(s)}{D} \int_0^\infty \left[J_1(\alpha a) \right]^2 \frac{d\alpha}{\alpha(\alpha^2 + q^2)^{1/2}}\end{aligned}\quad [5]$$

from which we derived the flux

$$\begin{aligned}Q(s) &= \frac{\frac{(C^\infty - C_{Av})a}{2} \frac{D^{1/2}}{as^{1/2}}}{\int_0^\infty \left[J_1\left(\beta \frac{as^{1/2}}{D^{1/2}}\right) \right]^2 \frac{d\beta}{\beta(\beta^2 + 1)^{1/2}}} \\ &= \frac{(C^\infty - C_{Av})a}{2} \Phi_2 \left(\frac{as^{1/2}}{D^{1/2}} \right)\end{aligned}\quad [6]$$

where we have defined the variable

$$\beta = \frac{D^{1/2}\alpha}{s^{1/2}}. \quad [7]$$

We have tabulated the function $\Phi_2(2)$ as a function of the dimensionless parameter $as^{1/2}/D^{1/2}$. The function is readily evaluated by most numerical integration techniques that handle oscillatory integrands; excellent accuracy

is obtained using a modified Burlirsch-Stoer method (17).

Equation [6] when inverted at low values of s (long t) gives the known steady state result (4)

$$Q = \frac{3\pi D}{8a} (C^\infty - C_{Av}) \quad [8]$$

whereas at large values of s (short t) we obtain the expected Cottrell behavior

$$Q = \frac{D^{1/2} (C^\infty - C_{Av})}{\pi^{1/2} t^{1/2}} \quad [9]$$

At other values of $as^{1/2}/D^{1/2}$ the values of $\Phi_2(as^{1/2}/D^{1/2})$ can be represented (maximum deviation 0.4%) by the rational function representation

$$\frac{2Q(s)}{(C^\infty - C_{Av})a} \approx \frac{1.3001 D^{1/2}}{as^{1/2}} + \frac{3\pi D}{4a^2 s} + \frac{0.6999 D^{1/2}/a}{1.79184 D^{1/2}/a + s^{1/2}} \quad [10]$$

Inversion then gives the flux

$$Q(t) \approx \frac{D(C^\infty - C_{Av})}{2a} \cdot \left\{ \frac{3\pi}{4} + \frac{1.3001}{\pi^{1/2}} \left(\frac{a^2}{Dt} \right)^{1/2} + \frac{0.6999}{\pi^{1/2}} \left(\frac{a^2}{Dt} \right)^{1/2} \right. \\ \left. - (0.6999)(1.79184) \exp \left[1.79184 \cdot \frac{D^{1/2} t^{1/2}}{a} \right]^2 \cdot \operatorname{erfc} \left[1.79184 \cdot \frac{D^{1/2} t^{1/2}}{a} \right] \right\}$$

$$\begin{aligned}
= & \frac{(C^\infty - C_{Av})}{2a} \cdot \left\{ \frac{3\pi}{4} + \frac{2.000}{\pi^{1/2}} \left(\frac{a^2}{Dt} \right)^{1/2} - 1.2541 \cdot \right. \\
& \left. \cdot \exp \left(1.79184 \cdot \frac{D^{1/2} t^{1/2}}{a} \right)^2 \cdot \operatorname{erfc} \left(1.79184 \cdot \frac{D^{1/2} t^{1/2}}{a} \right) \right\} \\
& [11]
\end{aligned}$$

which gives the correct long and short time limits.

The problem of the ring electrode may be solved similarly. The average concentration distribution over a disk source (the above analysis was based on a disk sink) is given by

$$\begin{aligned}
\bar{C}_{Av} &= \frac{C^\infty}{s} + \frac{Q(s)a}{D} \int_0^a \int_0^\infty J_0(\alpha r) J_1(\alpha a) \frac{r \, d\alpha \, dr}{(\alpha^2 + q^2)^{1/2}} \\
&= \frac{C^\infty}{s} + \frac{2Q(s)}{D} \int_0^\infty \left[J_1(\alpha a) \right]^2 \frac{d\alpha}{\alpha(\alpha^2 + q^2)^{1/2}} \\
& [12]
\end{aligned}$$

so that if we superimpose a disk sink of strength $Q(s)$ and radius b on the source disk of radius a , the combined source and sink give rise to a ring sink of strength $Q(s)$ and dimension $a < r < b$. Proceeding as above, $Q(s)$ may then be determined from

$$\begin{aligned}
\frac{C^\infty - C_{Av}}{s} &= \frac{2Q(s)b}{D(b^2 - a^2)} \int_a^b \int_0^\infty J_0(\alpha r) J_1(\alpha b) \frac{r \, d\alpha \, dr}{(\alpha^2 + q^2)^{1/2}} \\
&\quad - \frac{2Q(s)a}{D(b^2 - a^2)} \int_a^b \int_0^\infty J_0(\alpha r) J_1(\alpha a) \frac{r \, d\alpha \, dr}{(\alpha^2 + q^2)^{1/2}}
\end{aligned} \tag{13}$$

which is readily integrated to give

$$\begin{aligned}
\frac{C^\infty - C_{Av}}{s} &= \frac{2Q(s)}{D(b^2 - a^2)} \left\{ b \int_0^\infty J_1(\alpha b) \left\{ b J_1(\alpha b) - a J_1(\alpha a) \right\} \frac{d\alpha}{(\alpha^2 + q^2)^{1/2}} \right. \\
&\quad \left. - \left\{ a \int_0^\infty J_1(\alpha a) \left\{ b J_1(\alpha b) - a J_1(\alpha a) \right\} \frac{d\alpha}{(\alpha^2 + q^2)^{1/2}} \right. \right. \\
&\quad \left. - \frac{2Q(s)}{D(b^2 - a^2)} \left\{ b^2 \int_0^\infty [J_1(\alpha b)]^2 + a^2 \int_0^\infty [J_1(\alpha a)]^2 \right. \right. \\
&\quad \left. \left. - 2ab \int_0^\infty J_1(\alpha b) J_1(\alpha a) \right\} \frac{d\alpha}{(\alpha^2 + q^2)^{1/2}} \right\}
\end{aligned} \tag{14}$$

Therefore the flux may be written as

$$Q(s) = \frac{D(C^\infty - C_{Av})}{2} \cdot \frac{1}{s \left\{ \frac{b^2}{(b^2 - a^2)} \int_0^\infty [J_1(\alpha b)]^2 \frac{d\alpha}{(\alpha^2 + q^2)^{1/2}} + \frac{a^2}{(b^2 - a^2)} \int_0^\infty [J_1(\alpha a)]^2 \frac{d\alpha}{(\alpha^2 + q^2)^{1/2}} \right.}$$

$$\left. - \frac{2ab}{(b^2 - a^2)} \int_0^\infty J_1(\alpha b) J_1(\alpha a) \frac{d\alpha}{(\alpha^2 + q^2)^{1/2}} \right\}$$

[15]

Again we make the substitution

$$\beta = D^{1/2} \alpha / s^{1/2} \quad [16]$$

and additionally

$$\gamma = b / a \quad [17]$$

to obtain

$$Q(s) = \frac{(C^\infty - C_{Av})a}{2} \cdot \frac{D^{1/2}}{as^{1/2}} \cdot \frac{1}{\left\{ \frac{\gamma^2}{(\gamma^2 - 1)} \int_0^\infty \left[J_1 \left(\beta \gamma \frac{as^{1/2}}{D^{1/2}} \right) \right]^2 \frac{d\beta}{\beta(\beta^2 + 1)^{1/2}} \right.}$$

$$+ \frac{1}{(\gamma^2 - 1)} \int_0^\infty \left[J_1 \left(\beta \frac{as^{1/2}}{D^{1/2}} \right) \right]^2 \frac{d\beta}{\beta(\beta^2 + 1)^{1/2}}$$

$$\left. - \frac{2\gamma}{(\gamma^2 - 1)} \int_0^\infty J_1 \left(\beta \gamma \frac{as^{1/2}}{D^{1/2}} \right) J_1 \left(\beta \frac{as^{1/2}}{D^{1/2}} \right) \frac{d\beta}{(\beta^2 + q^2)^{1/2}} \right\}$$

[18]

which can be written in the more convenient form

$$Q(s) = \frac{(C^\infty - C_{Av})a}{2} \Phi_{12} \left(\gamma, \frac{D^{1/2}}{as^{1/2}} \right) \quad [19]$$

We evaluate $Q \left(\gamma, \frac{D^{1/2}}{as^{1/2}} \right)$ in the same way described for the disk. Φ_{12} is again determined from an appropriate integration method.

The behavior of disks and rings is compared in the Laplace plane in Figures 1(a) and (b). Figure 1(a) shows that in the region corresponding to short times, large s , $Q(s)s^{1/2}$ is independent of s , i.e. $Q(s) \propto s^{-1/2}$ so that $Q(t) \propto t^{-1/2}$ for both disk and ring electrodes i.e. the behavior follows the Cottrell equation. The duration of this region is determined by the time range for which the transient is dominated by planar diffusion and this duration therefore decreases with decreasing γ i.e. with decreasing ring thickness. In the region corresponding to long times, small s , $Q(s)s$ becomes independent of s , i.e. $Q(s) \propto s^{-1}$ so that the flux reaches a steady state, Figure 1(b). It can be seen that the magnitude of this steady state flux increases markedly with decreasing ring thickness (1) (decreasing γ). Figure 1(b) also shows that for ring electrodes, this region is preceded by a section where $Q(s)s$ is nearly independent of s , i.e. the flux reaches values which are very close to those corresponding to the final steady state at short times; moreover, these times decrease with decreasing γ . This behavior is due to the expansion of the hemi-torroidal diffusion zones which develop around the ring electrodes at times which are long compared to those for which the system follows planar diffusion but at which the final spherical diffusion field has not yet been established. The flux varies approximately with $(\ln t)^{-1}$ in this region.

The sizes of the platinum disk microelectrodes used in the measurements of the chronoamperometric transients were determined from microscopic investigation of the platinum before and after mounting, and from an analysis of the slope of a plot of the limiting current for ferrocyanide reduction vs. nominal electrode radius of the disk determined from the microscopic measurements. The diffusion coefficient of ferrocyanide was determined to be $6.74 \times 10^{-6} \text{ cm}^2 \text{ s}^{-1}$, in good agreement with the literature value (18). Further, the analysis of voltammetric experiments in 1, 5, and 10mM solutions of $\text{Ru(III)(NH}_3)_6^{+++}$ in 0.1M KCl gave an average value for the diffusion coefficient of $6.7 \times 10^{-6} \text{ cm}^2 \text{ s}^{-1}$. Wipf et al. (19) have reported a value for D of $6.7 \times 10^{-6} \text{ cm}^2 \text{ s}^{-1}$ in 0.1M sodium trifluoroacetate.

Determination of the dimensions of the ring electrode were made by (a) optical and electron microscopy, and (b) measurement of the limiting current of the ruthenium solution and use of Equations [35], [36], and [37] of reference (1).

Chronoamperometric experiments with the disk electrodes were performed on the 1mM $\text{Ru(III)(NH}_3)_6^{+++}$ solutions. The potential was stepped from 0.0 to -350mV (well into the limiting current plateau). The responses are shown in Figure 2. Included in Figure 2 are theoretical responses determined from Equation [11] using the experimental parameters given above.

The results for the ring experiment, including the results predicted from Equation [19] are also included in Figure 2.

The responses for the smaller electrodes for the two geometries are seen to approach steady state values markedly faster than the larger electrodes, as is expected. As predicted, the currents at ring electrodes approach values close to those corresponding to the steady state at times which are short compared to those for disks of comparable radii. Thus the ring electrode used in this experiment has already reached a current within 0.01nA of the steady

state value at about 40ms, whereas the 1 μ m disk has not reached this level at 160ms.

Acknowledgement

We thank the Office of Naval Research for support of th's work.

Literature References

1. M. Fleischmann, S. Pons, D. Rolison, and P.P. Schmidt, "Ultramicroelectrodes", Datatech, Morganton, NC, 1987.
2. M. Fleischmann, J. Daschbach, and S. Pons, J. Electroanal. Chem., 250 (1988)
3. M. Fleischmann and S. Pons, J. Electroanal. Chem., 250 (1988)
- 4.. M. Fleischmann and S. Pons, J. Electroanal. Chem., 222 (1987) 107.
5. K. Aoki and J. Osteryoung, J. Electroanal. Chem., 122 (1981) 19.
6. B. Speiser and S. Pons, Can. J. Chem., 60 (1982) 1352.
7. B. Speiser and S. Pons, Can. J. Chem., 60 (1982) 2463.
8. J. Cassidy and S. Pons, Can. J. Chem., 63 (1985) 3577.
9. D. Shoup and A. Szabo, J. Electroanal. Chem., 140 (1982) 237.
10. K. Aoki and J. Osteryoung, J. Electroanal. Chem., 160 (1984) 335.
11. K. B. Oldham, J. Electroanal. Chem., 122 (1981)1.
12. M. Fleischmann, J. Daschbach, S. Pons, J. Electroanal. Chem., submitted.
13. M. Fleischmann, J. Daschbach, S. Pons, J. Electroanal. Chem., submitted.
14. M. Fleischmann, D. Pletcher, G. Denuault, J. Daschbach, S. Pons, J. Electroanal. Chem., submitted.
15. M. Fleischmann, D. Pletcher, G. Denuault, J. Daschbach, S. Pons, J. Electroanal. Chem., submitted.
16. M. Fleischmann, D. Pletcher, G. Denuault, J. Daschbach, S. Pons, J. Electroanal. Chem., submitted.
17. W. H. Press, B. P. Flannery, S. A. Teukolsky, and W. T. Vetterling, "Numerical Recipes", Cambridge Press, Cambridge, 1987.
18. See, for instance, R. N. Adams, "Electrochemistry at Solid Electrodes", Marcell Dekker, New York, 1969.
19. D. O. Wipf, E.W. Kristensen, M. R. Deakin, And R. M. Wightman, Anal. Chem. 60 (1988) 306.

Glossary of Symbols Used

a, b	Radius of disk, cm
C	Concentration, mols cm ⁻³
C [∞]	Bulk concentration, mols cm ⁻³
C _{Av}	Average concentration, mols cm ⁻³
D	Diffusion coefficient, cm ² s ⁻¹
J ₀ , J ₁	Bessel functions
q	Parameter (s/D) ^{1/2}
Q	Flux, mols cm ⁻² s ⁻¹
r	Radial coordinate, cm
s	Laplace transform variable
t	Time, s
z	Coordinate normal to plane of disk, cm
α	Continuous dummy integration variable.
β	Parameter D ^{1/2} α/s ^{1/2}
γ	a/b

$$\Phi_2 = \frac{\frac{D^{1/2}}{as^{1/2}}}{\int_0^\infty \left[J_1 \left(\beta \frac{as^{1/2}}{D^{1/2}} \right) \right]^2 \frac{d\beta}{\beta(\beta^2 + 1)^{1/2}}}$$

$$\Phi_{12} = \frac{D^{1/2}}{as^{1/2}} \cdot \frac{1}{\left\{ \frac{\gamma^2}{(\gamma^2 - 1)} \int_0^\infty \left[J_1 \left(\beta \gamma \frac{as^{1/2}}{D^{1/2}} \right) \right]^2 \frac{d\beta}{\beta(\beta^2 + 1)^{1/2}} \right.}$$

$$+ \frac{1}{(\gamma^2 - 1)} \int_0^\infty \left[J_1 \left(\beta \frac{as^{1/2}}{D^{1/2}} \right) \right]^2 \frac{d\beta}{\beta(\beta^2 + 1)^{1/2}}$$

$$\left. - \frac{2\gamma}{(\gamma^2 - 1)} \int_0^\infty J_1 \left(\beta \gamma \frac{as^{1/2}}{D^{1/2}} \right) J_1 \left(\beta \frac{as^{1/2}}{D^{1/2}} \right) \frac{d\alpha}{(\alpha^2 + q^2)^{1/2}} \right\}}$$

Figure Legend

1. Comparison of the behavior of disk and ring electrodes.
 - (a) The behavior of $2Q(s)/(C^\infty - C_{Av})\gamma a \cdot (\gamma a s^{1/2}/D^{1/2})$
 - (b) The behavior of $2Q(s)/(C^\infty - C_{Av})\gamma a \cdot (\gamma a s^{1/2}/D^{1/2})^2$

2. Chronoamperometric responses (circles) and theoretical prediction (solid lines) for Pt disks of various diameters and a ring electrode in 0.1M $\text{Ru(III)(NH}_3)_6^{+++}$ in 0.1M KCl. Potential step was from 0.0 to -350mV vs. Pt pseudo reference.

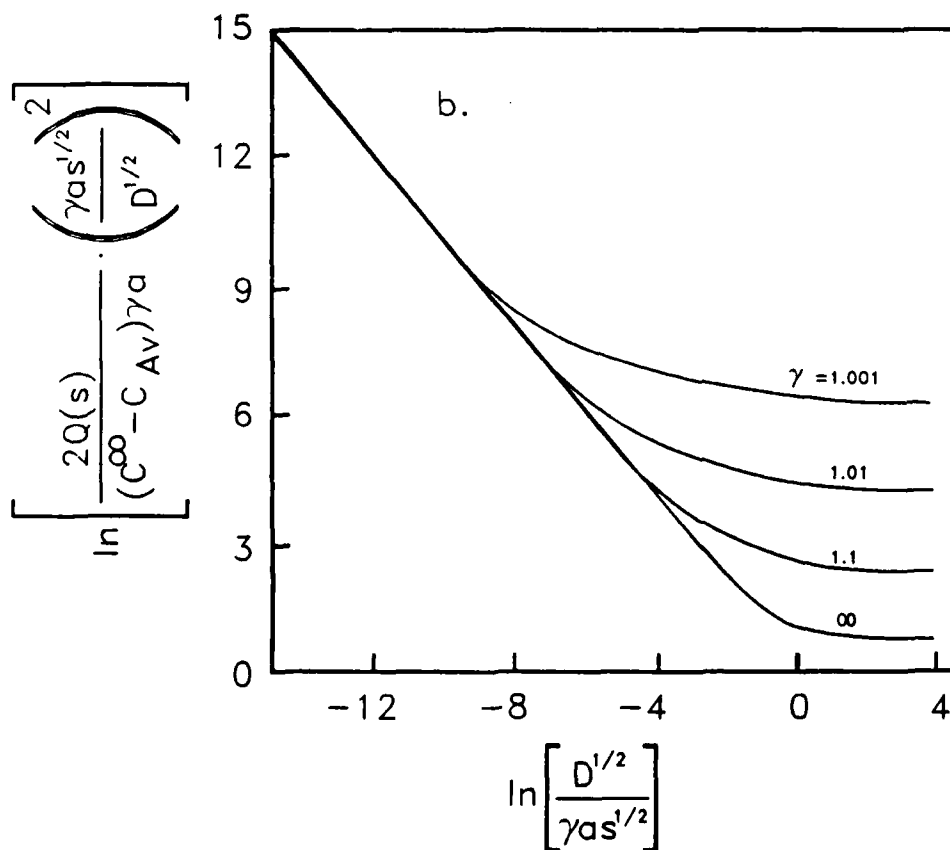
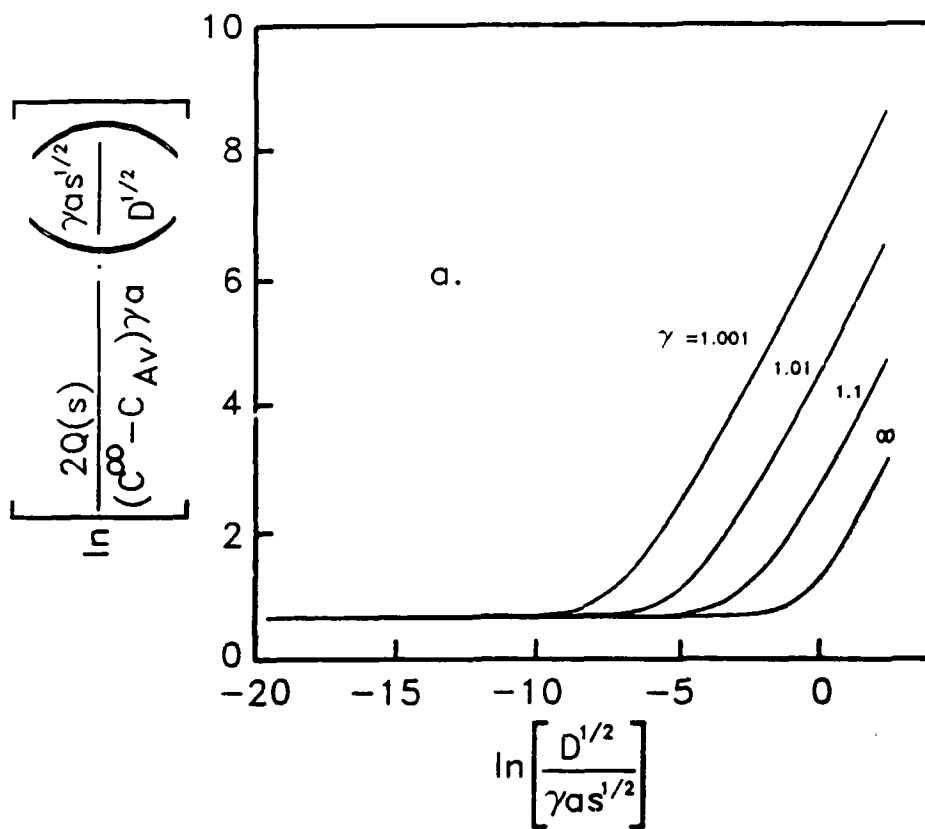


Fig 1







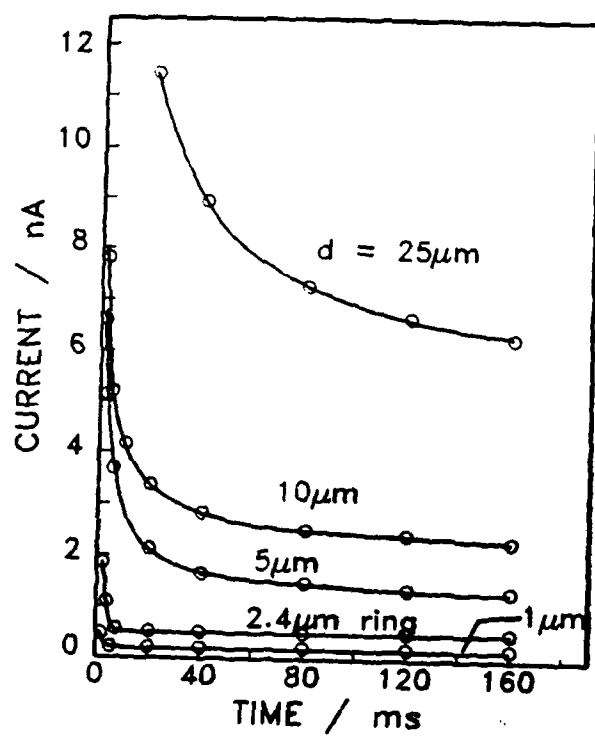


Fig 2

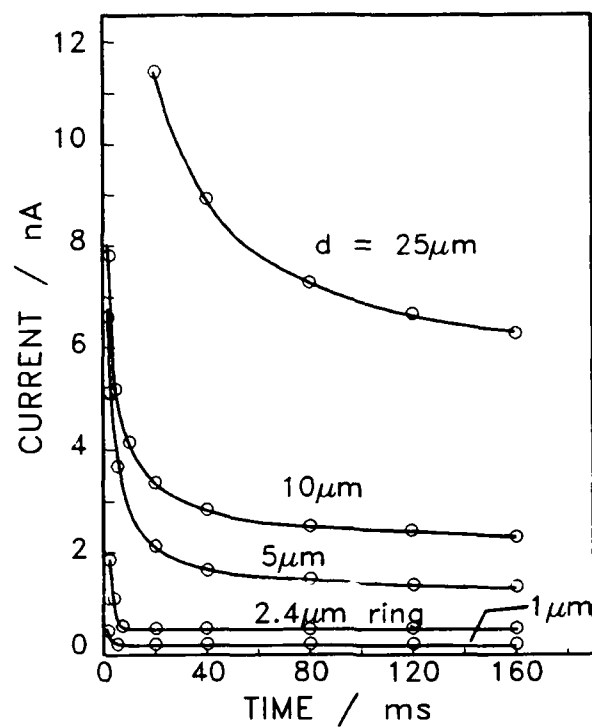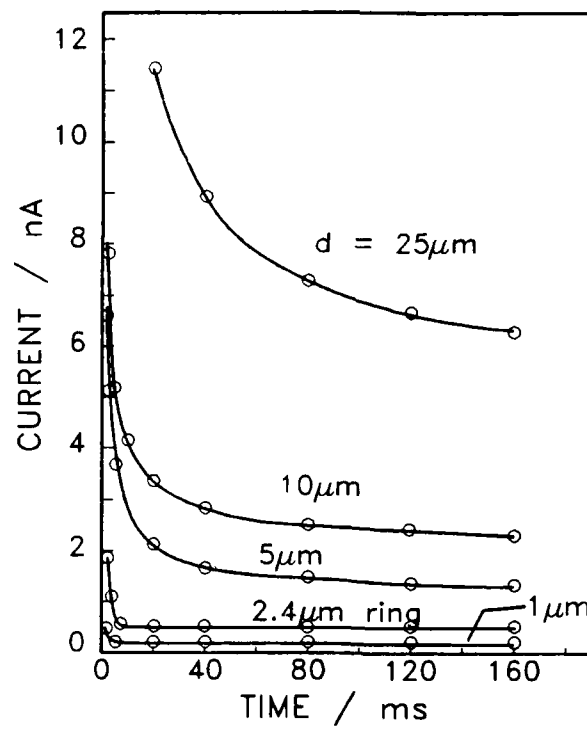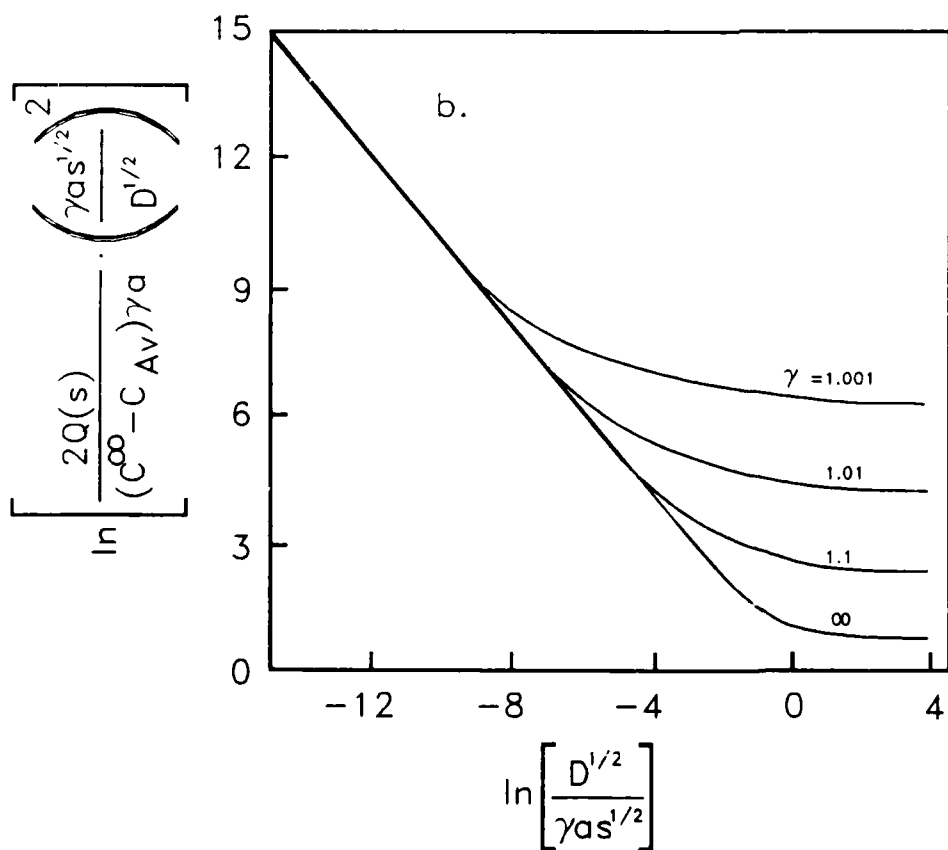

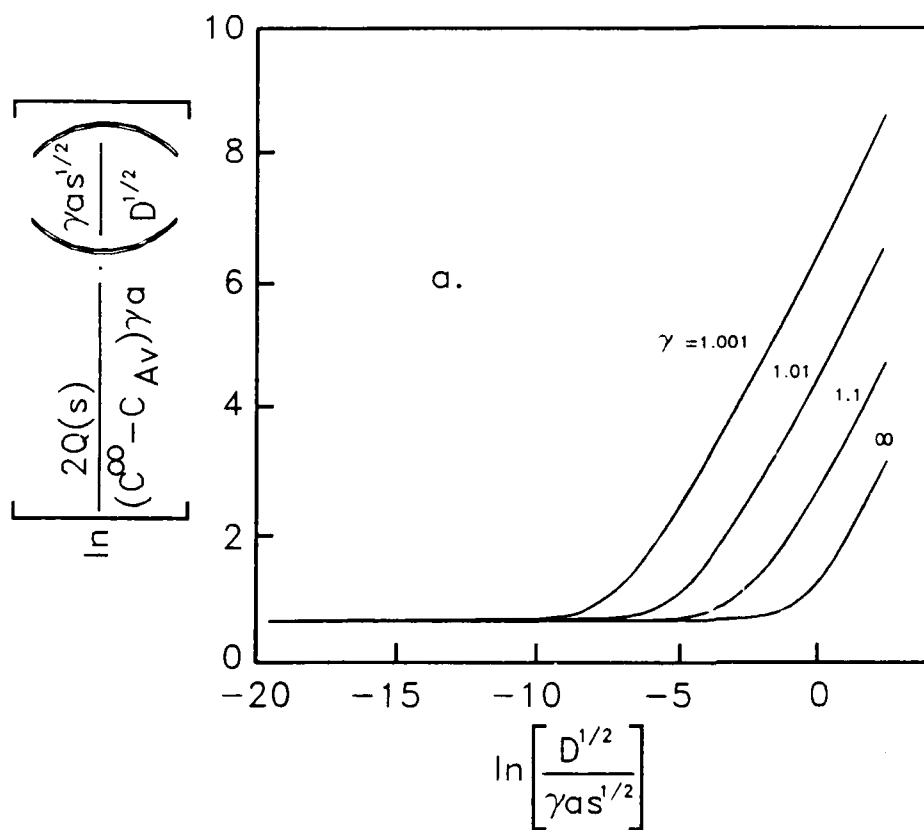

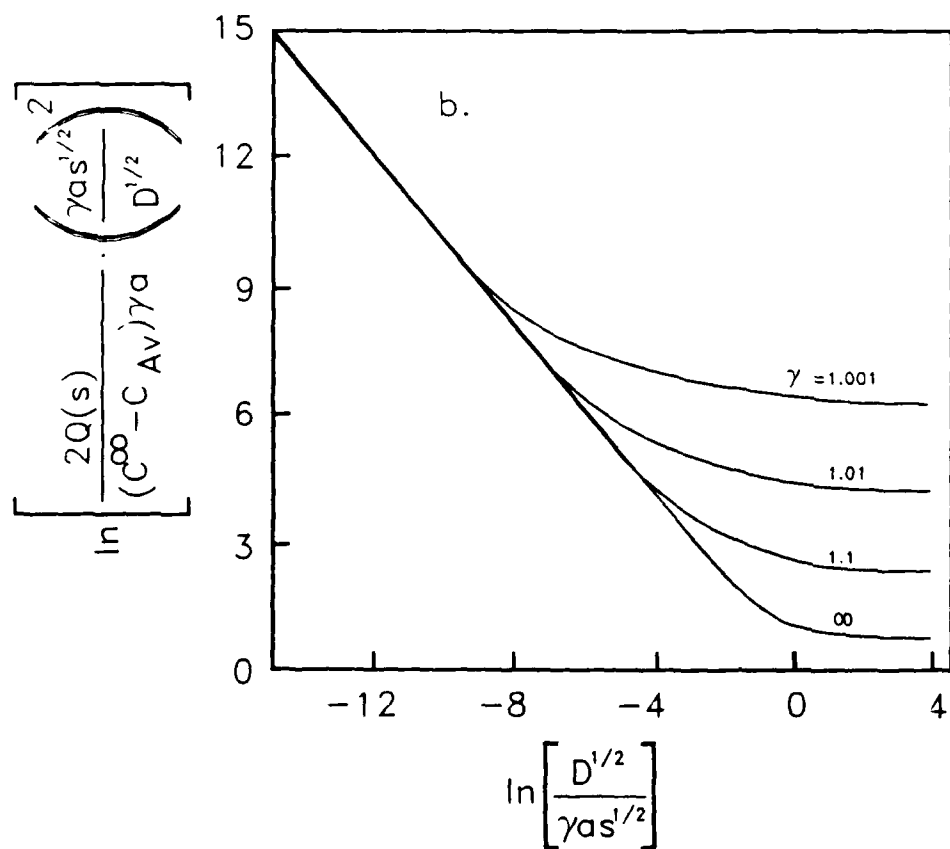

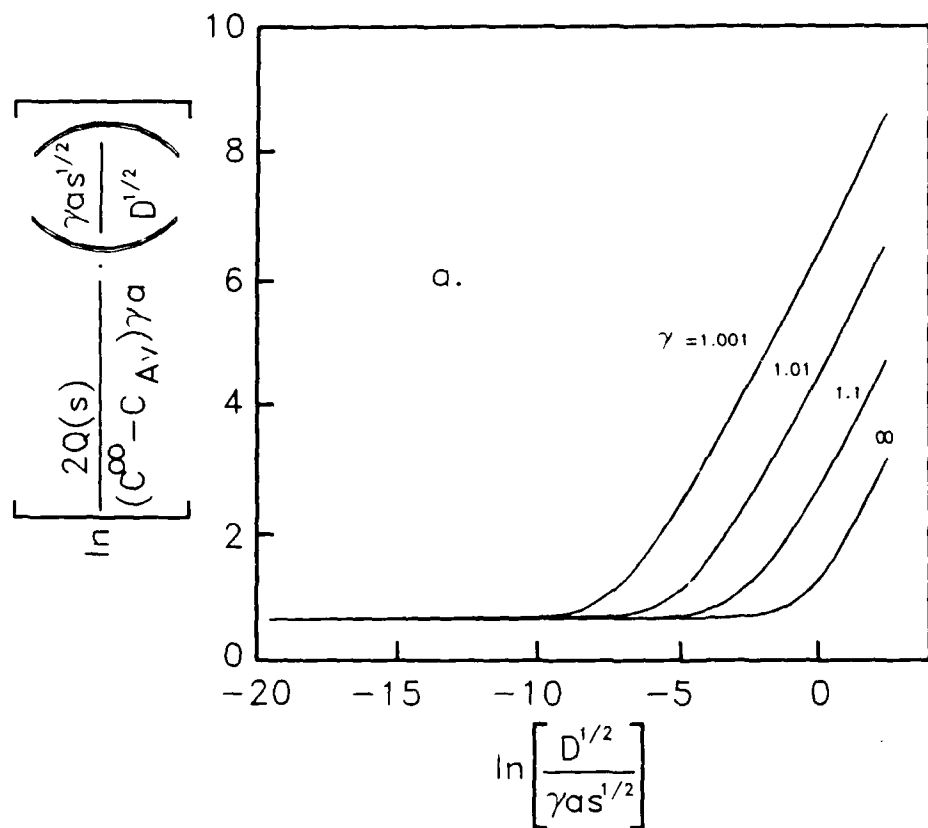

ABSTRACTS DISTRIBUTION LIST, SDIO/IST

Dr. Robert A. Osteryoung
Department of Chemistry
State University of New York
Buffalo, NY 14214

Dr. Douglas N. Bennion
Department of Chemical Engineering
Brigham Young University
Provo, UT 84602

Dr. Stanley Pons
~~Department of Chemistry~~
~~University of Utah~~
Salt Lake City, UT 84112

Dr. H. V. Venkatesetty
Honeywell, Inc.
10701 Lyndale Avenue South
Bloomington, MN 55420

Dr. J. Foos
EIC Labs Inc.
111 Downey St.
Norwood, MA 02062

Dr. Neill Weber
Ceramatec, Inc.
163 West 1700 South
Salt Lake City, UT 84115

Dr. Subhash C. Narang
SRI International
333 Ravenswood Ave.
Menlo Park, CA 94025

Dr. J. Paul Pemsler
Castle Technology Corporation
52 Dragon Ct.
Woburn, MA 01801

Dr. R. David Rauh
EIC Laboratory Inc.
111 Downey Street
Norwood, MA 02062

Dr. Joseph S. Foos
EIC Laboratories, Inc.
111 Downey Street
Norwood, Massachusetts 02062

Dr. Donald M. Schleich
Department of Chemistry
Polytechnic Institute of New York
333 Jay Street
Brooklyn, New York 01

Dr. Stan Szpak
Code 633
Naval Ocean Systems Center
San Diego, CA 92152-5000

Dr. George Blomgren
Battery Products Division
Union Carbide Corporation
25225 Detroit Rd.
Westlake, OH 44145

Dr. Ernest Yeager
Case Center for Electrochemical
Science
Case Western Reserve University
Cleveland, OH 44106

Dr. Mel Miles
Code 3852
Naval Weapons Center
China Lake, CA 93555

Dr. Ashok V. Joshi
Ceramatec, Inc.
2425 South 900 West
Salt Lake City, Utah 84119

Dr. W. Anderson
Department of Electrical &
Computer Engineering
SUNY - Buffalo
Amherst, Massachusetts 14260

Dr. M. L. Gopikanth
Chemtech Systems, Inc.
P.O. Box 1067
Burlington, MA 01803

Dr. H. F. Gibbard
Power Conversion, Inc.
495 Boulevard
Elmwood Park, New Jersey 07407

DL/1113/87/2

TECHNICAL REPORT DISTRIBUTION LIST, GEN

	<u>No. Copies</u>		<u>No. Copies</u>
Office of Naval Research Attn: Code 1113 800 N. Quincy Street Arlington, Virginia 22217-5000	2	Dr. David Young Code 334 NORDA NSTL, Mississippi 39529	1
Dr. Bernard Douda Naval Weapons Support Center Code 50C Crane, Indiana 47522-5050	1	Naval Weapons Center Attn: Dr. Ron Atkins Chemistry Division China Lake, California 93555	1
Naval Civil Engineering Laboratory Attn: Dr. R. W. Drisko, Code LS2 Port Hueneme, California 93401	1	Scientific Advisor Commandant of the Marine Corps Code RD-1 Washington, D.C. 20380	1
Defense Technical Information Center Building 5, Cameron Station Alexandria, Virginia 22314	12 high quality	U.S. Army Research Office Attn: CRD-AA-IP P.O. Box 12211 Research Triangle Park, NC 27709	1
DTNSRDC Attn: Dr. H. Singerman Applied Chemistry Division Annapolis, Maryland 21401	1	Mr. John Boyle Materials Branch Naval Ship Engineering Center Philadelphia, Pennsylvania 19112	1
Dr. William Tolles Superintendent Chemistry Division, Code 6100 Naval Research Laboratory Washington, D.C. 20375-5000	1	Naval Ocean Systems Center Attn: Dr. S. Yamamoto Marine Sciences Division San Diego, California 91232	1

DL/1113/87/2

ABSTRACTS DISTRIBUTION LIST, SDIO/IST

Dr. V. R. Koch
Covalent Associates
52 Dragon Court
Woburn, MA 01801

Dr. Randall B. Olsen
Chronos Research Laboratories, Inc.
4186 Sorrento Valley Blvd.
Suite H
San Diego, CA 92121

Dr. Alan Hooper
Applied Electrochemistry Centre
Harwell Laboratory
Oxfordshire, OX11 0RA UK

Dr. John S. Wilkes
Department of the Air Force
The Frank J. Seiler Research Lab.
United States Air Force Academy
Colorado Springs, CO 80840-6528

Dr. Gary Bullard
Pinnacle Research Institute, Inc.
10432 N. Tantan Avenue
Cupertino, CA 95014

Dr. J. O'M. Bockris
Ementech, Inc.
Route 5, Box 946
College Station, TX 77840

Dr. Michael Binder
Electrochemical Research Branch
Power Sources Division
U.S. Army Laboratory Command
Fort Monmouth, New Jersey 07703-5000

Professor Martin Fleischmann
Department of Chemistry
University of Southampton
Southampton, Hants, SO9 5NH UK